


Note: Refer to the MC302 Owner's Manual page 8 for additional connection information.



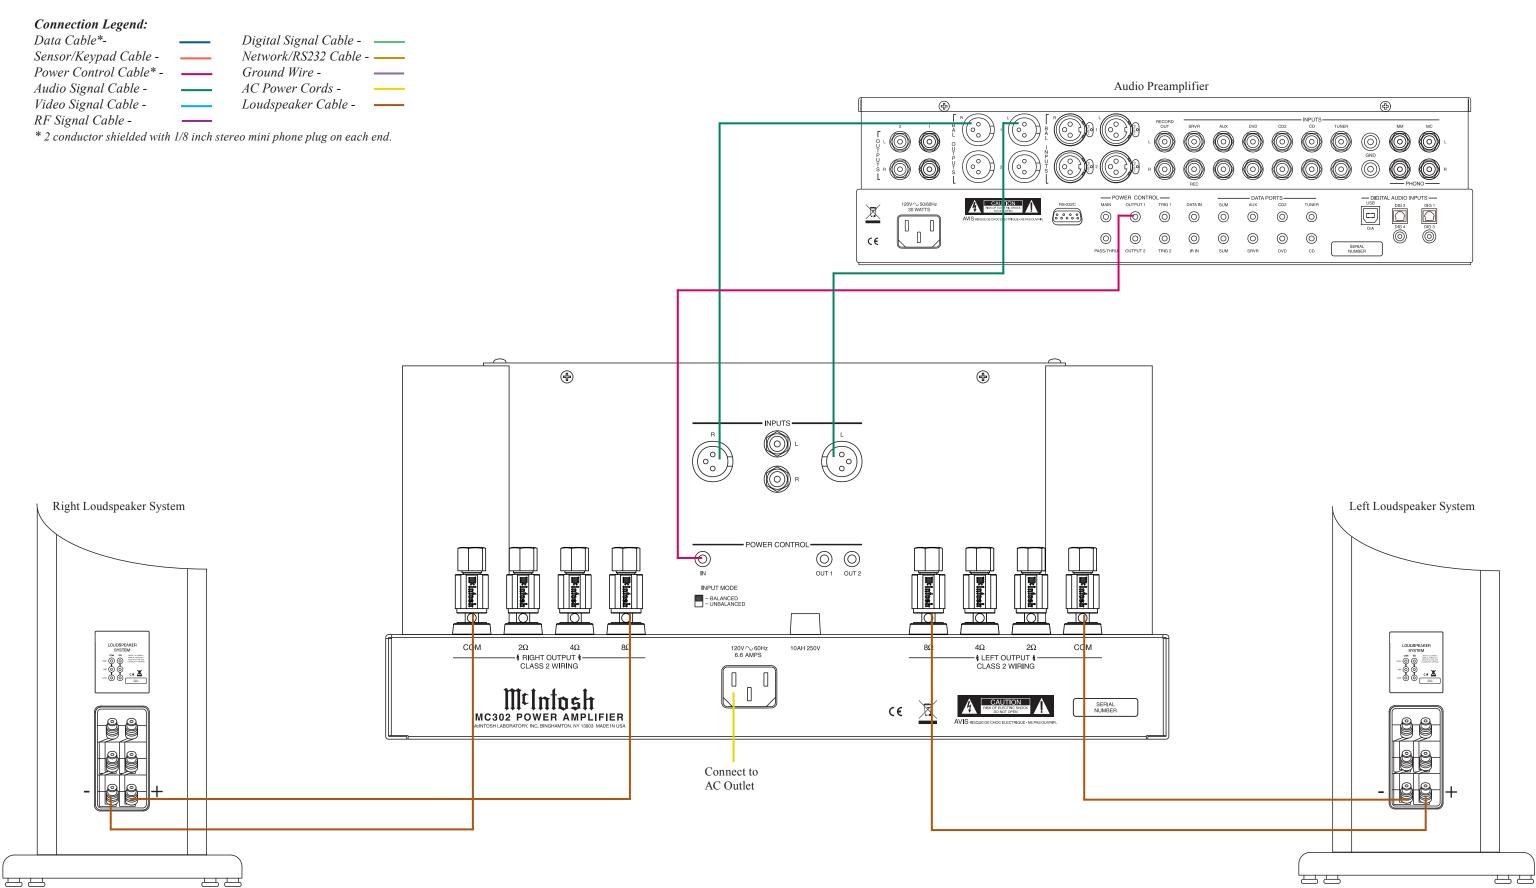

Note: Refer to the MC452 Owner's Manual page 10 for additional connection information. Audio Preamplifier Connection Legend: Data Cable\*-Digital Signal Cable - -Network/RS232 Cable - -Sensor/Keypad Cable -Power Control Cable\* -Ground Wire -Audio Signal Cable -AC Power Cords -Video Signal Cable -Loudspeaker Cable -SUM AUX RF Signal Cable -\* 2 conductor shielded with 1/8 inch stereo mini phone plug on each end. C€ 4 **(** Power Amplifier One OUT 1 OUT 2 120V ← 60Hz 6.6 AMPS MC302 POWER AMPLIFIER Right Loudspeaker System Left Loudspeaker System Connect to AC Outlet **(+**) 4 Power Amplifier Two OUT 1 OUT 2 120V ~ 60Hz 6.6 AMPS MC302 POWER AMPLIFIER Connect to AC Outlet 44